


H61 HV/LV distribution transformer

Compliant with IEC standards & NF C52 distribution transformer standard



Integrated, compact & lightweight construction
 Low losses, high energy efficiency
 Fully sealed weather-resistant tank enclosure
 Designed for outdoor pole mounting

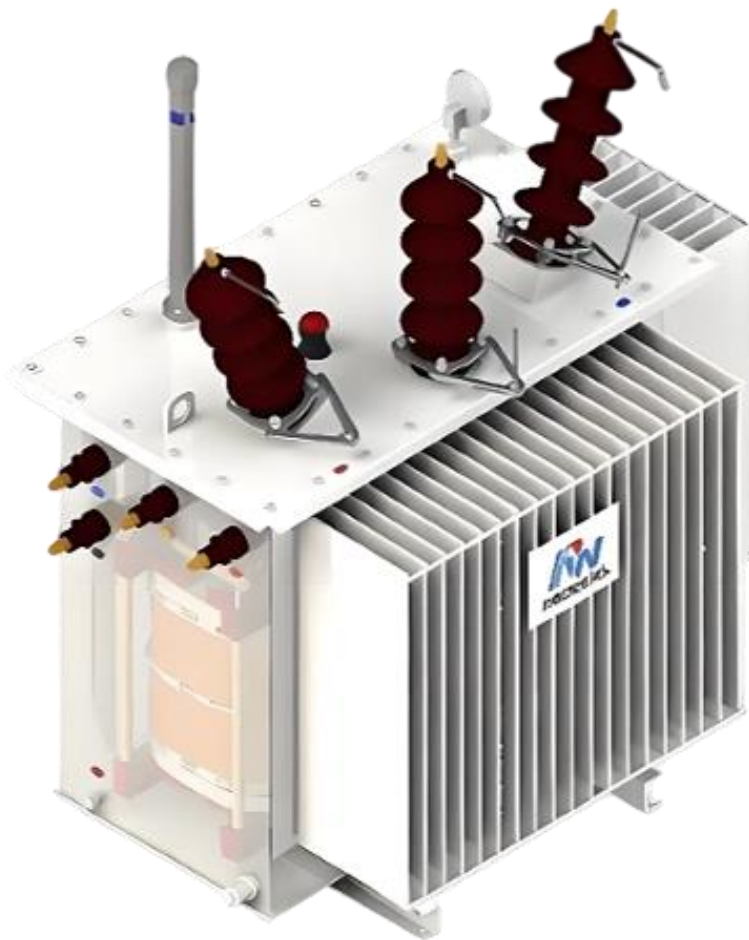

Rated Voltage(Dual-rated voltage optional)	HV:15...36kV LV: 0.4 kV
Rated Power	25...160kVA
Rated Frequency	50 Hz
High Voltage Insulation Level	11.45...36kV
Tapping	$\pm 2 \times 2.5\%$
Vector Group	Dyn0, Dyn11, Yzn11
Short-circuit Impedance (75 °C)	4% / 4.5%
Losses No-load	145...530W
Losses Load 75°C	900...3350W
Efficiency at Full Load $\cos\Phi=1$	97.1...98.97%
Efficiency at Full Load $\cos\Phi=0.8$	96.4...98.72%
Efficiency at 75% Load $\cos\Phi=1$	97.65...99.09%
Efficiency at 75% Load $\cos\Phi= 0.8$	96.62...98.86%

Provided customized manufacture
 Whole solutions for design, assembly, test...
 Accountable solution for safety and reliability
 Wide range offering, easy business and convenient installation

ROCKWILL®

Powered by [IEE Business](#)

